


2-INPUT 3CHANNEL VIDEO SWITCH


■ GENERAL DESCRIPTION

NJM2284 is a switching IC for switching over from one audio or video input signal to another. Internalizing 2 inputs, 1 output, and then each set of 3 can be operated independently. One of them is a Clamp type" and it can be operated while DC level fixed in position of the video signal. It is a higher efficiency video switch, featuring the operating supply voltage 4.75 to 13.0V, the frequency feature 10MHz, and then the Crosstalk 75dB (at 4.43MHz).


■ PACKAGE OUTLINE



NJM2284D



NJM2284M



NJM2284V

■ FEATURES

- 2 Input-1 Output Internalizing 3 Circuits (one of them is a Clamp type).
- Wide Operating Voltage
- Crosstalk 75dB (at 4.43MHz)
- Wide Bandwidth Frequency Feature 10MHz (2V_{P-P} Input)
- Package Outline DIP-16, DMP-16, SSOP-16


■ RECOMMENDED OPERATING CONDITION

- Supply Voltage V⁺ 4.75 to 13.0V

■ APPLICATIONS

- VCR, Video Camera, AV-TV, Video Disk Player.

■ BLOCK DIAGRAM

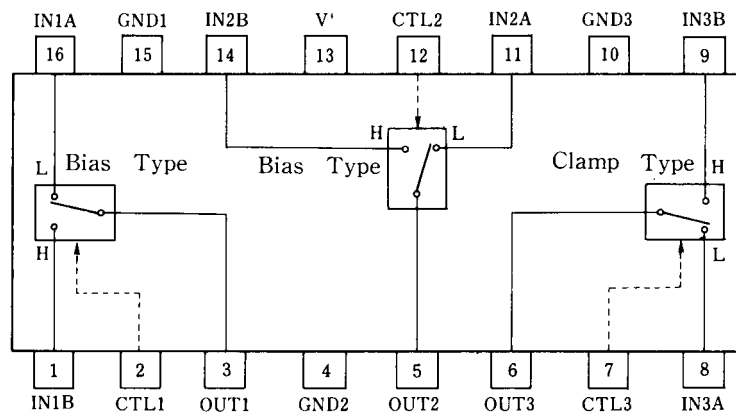

NJM2284D
NJM2284M
NJM2284V

NJM2284

■ MAXIMUM RATINGS

($T_a = 25^\circ\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	14	V
Power Dissipation	P_D	(DIP16) 700 (DMP16) 350 (SSOP16) 300	mW mW mW
Operating Temperature Range	T_{opr}	-40 to +85	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to +125	$^\circ\text{C}$

■ ELECTRICAL CHARACTERISTICS

($V^+ = 5\text{V}$, $T_a = 25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current (1)	I_{CC1}	$V^+ = 5\text{V}$ (Note1)	8.1	11.6	15.1	mA
Operating Current (2)	I_{CC2}	$V^+ = 9\text{V}$ (Note1)	10.2	14.6	19.0	mA
Voltage Gain	G_V	$V_I = 100\text{kHz}$, $2V_{P,P}$, V_O / V_I	-0.6	-0.1	+0.4	dB
Frequency Gain	G_F	$V_I = 2V_{P,P}$, V_O (10MHz) / V_O (100kHz)	-1.0	0	+1.0	dB
Differential Gain	DG	$V_I = 2V_{P,P}$, Standard Staircase Signal	-	0.3	-	%
Differential Phasa	DP	$V_I = 2V_{P,P}$, Standard Staircase Signal	-	0.3	-	deg
Output Offset Voltage	V_{OS}	(Note2)	-10	0	+10	mV
Crosstalk	CT	$V_I = 2V_{P,P}$, 4.43MHz, V_O / V_I	-	-75	-	dB
Switch Change Over Voltage	V_{CH}	All inside Switch ON	2.5	-	-	V
Switch Change Over Voltage	V_{CL}	All inside Switch OFF	-	-	1.0	V

(Note1) $S1 = S2 = S3 = S4 = S5 = S6 = S7 = 1$


(Note2) $S1 = S2 = S3 = S4 = S5 = S6 = 1$, $S7 = 1 \rightarrow 2$ Measure the output DC voltage difference

■ TERMINAL EXPLANATION

PIN No.	PIN NAME	VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1 11 14	IN 1 A IN 1 B IN 2 A IN 2 B [Input]	2.5V	
8 9	IN 3 A IN 3 B [Input]	1.5V	
2 12 7	CTL 1 CTL 2 CTL 3 [Switching]		
3 5	OUT1 OUT2	1.8V	
6	OUT3 [Output]	0.8V	
13	V ⁺	5V	
15 4 10	GND 1 GND 2 GND 3		

NJM2284

TEST CIRCUIT

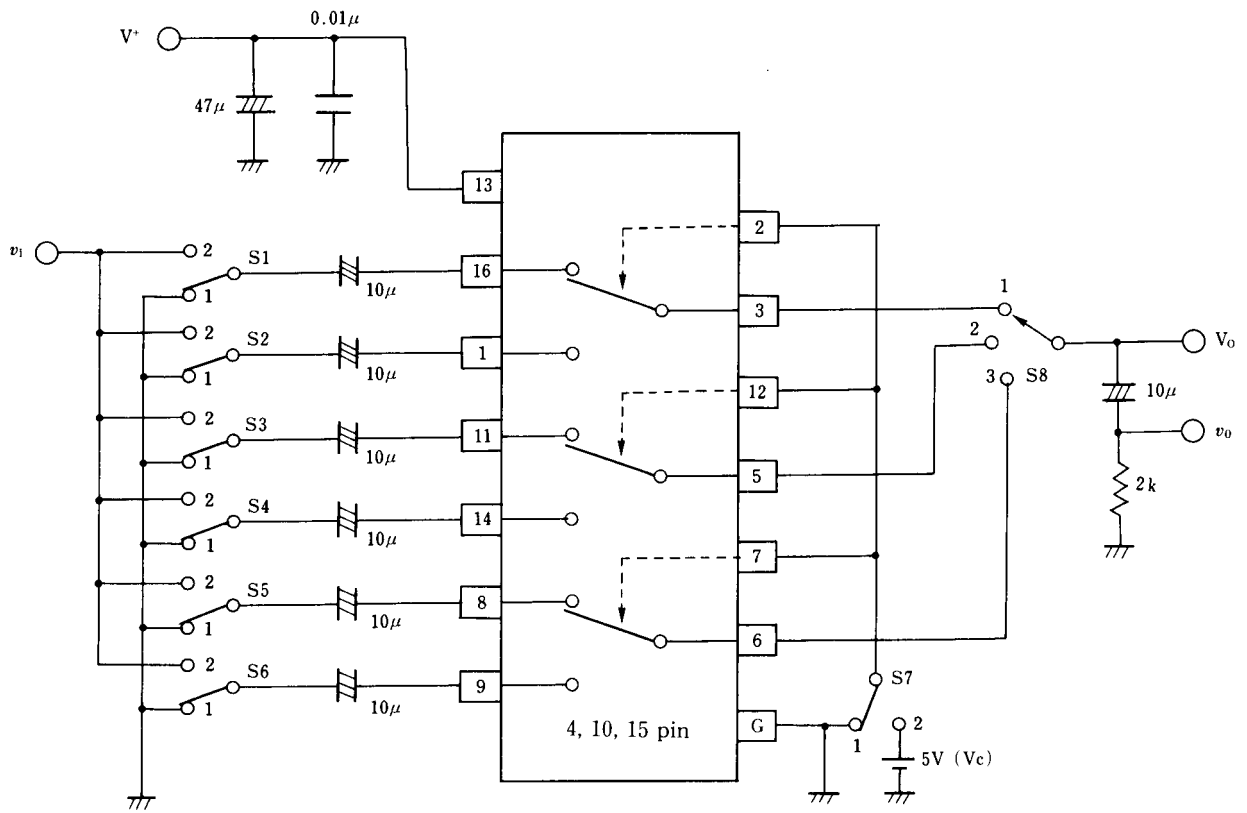


Parameter	S1	S2	S3	S4	S5	S6	S7	S8	Test Part
I_{CC1}	1	1	1	1	1	1	1	1	V^+
I_{CC2}	1	1	1	1	1	1	1	1	
G_{v1}	2	1	1	1	1	1	1	1	v_o
G_{F1}	2	1	1	1	1	1	1	1	
DG_1	2	1	1	1	1	1	1	1	
DP_1	2	1	1	1	1	1	1	1	
CT1	2	1	1	1	1	1	2	1	v_o
CT2	1	2	1	1	1	1	1	1	
CT3	1	1	2	1	1	1	2	2	
CT4	1	1	1	2	1	1	1	2	
CT5	1	1	1	1	2	1	2	3	
CT6	1	1	1	1	1	2	1	3	
V_{OS1}	1	1	1	1	1	1	1/2	1	V_o
V_{C1}	1/2	2/1	1	1	1	1	V_c	1	V_c
THD	2	1	1	1	1	1	1	1	v_o

■ TYPICAL CHARACTERISTICS


Operating Current 1 vs. Temperature

($V^+ = 9V$)

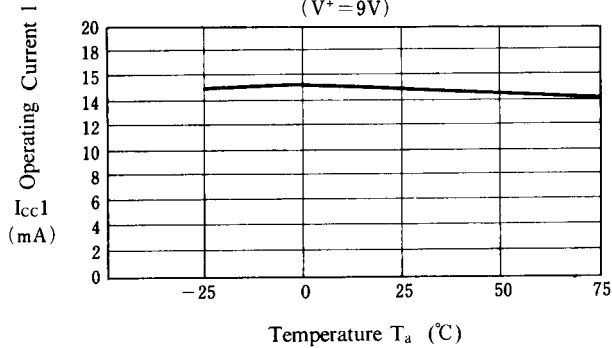


Operating Current 2 vs. Temperature

($V^+ = 5V$)

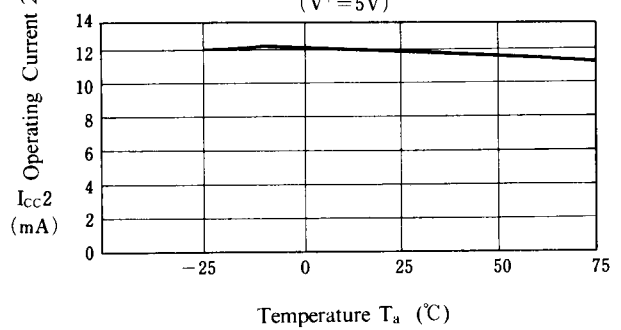


Voltage Gain 1 vs. Temperature

($V^+ = 5V$)

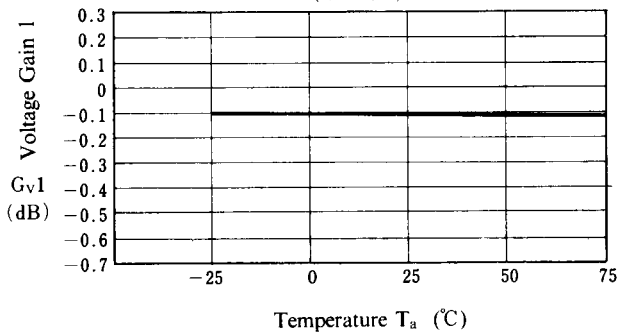


Frequency Gain 1 vs. Temperature

($V^+ = 5V$)

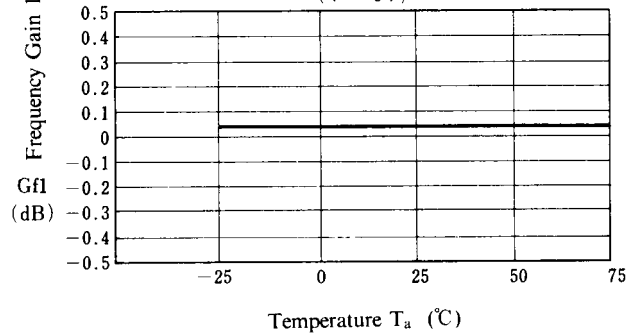


Differential Gain 1 vs. Temperature

($V^+ = 5V$)

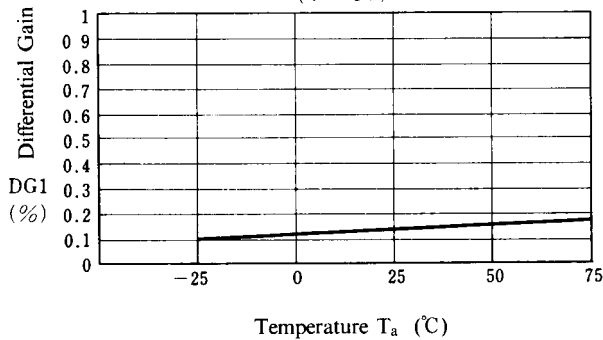

Differential Phase 1 vs. Temperature


($V^+ = 5V$)

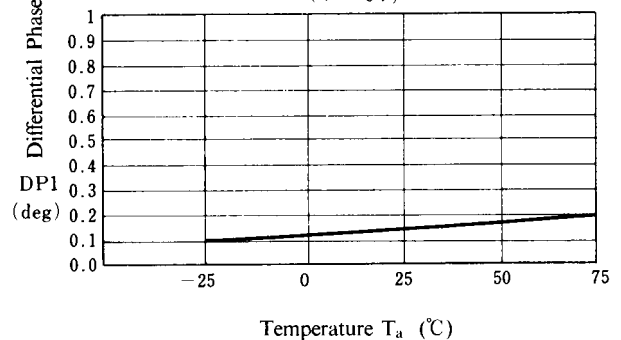

■ TYPICAL CHARACTERISTICS


Offset Voltage 1 vs. Temperature

($V^+ = 5V$)

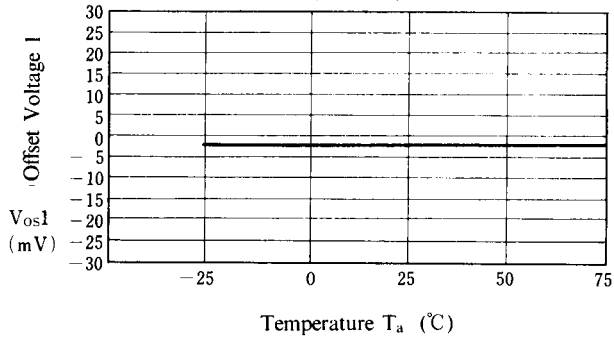


Crosstalk 1 vs. Temperature

($V^+ = 5V$)

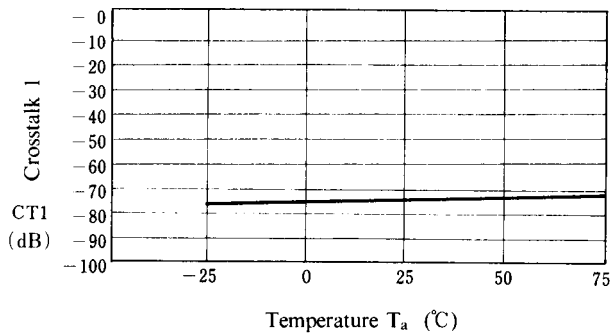


Crosstalk 2 vs. Temperature

($V^+ = 5V$)

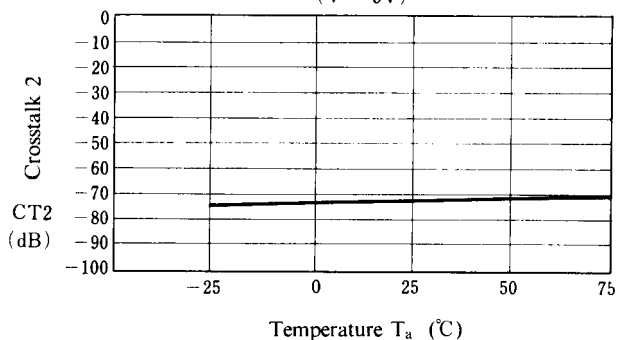


Crosstalk 3 vs. Temperature

($V^+ = 5V$)

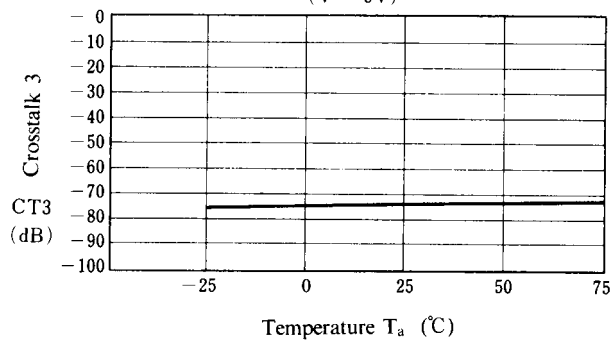


Crosstalk 4 vs. Temperature

($V^+ = 5V$)

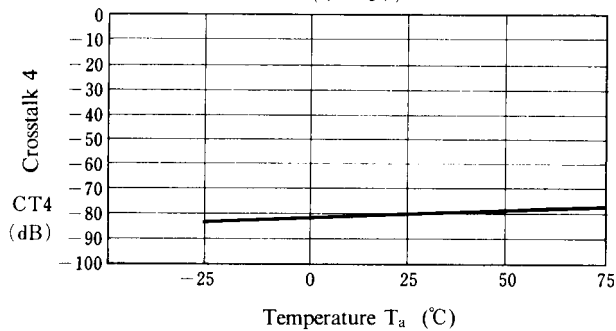


Crosstalk 5 vs. Temperature

($V^+ = 5V$)

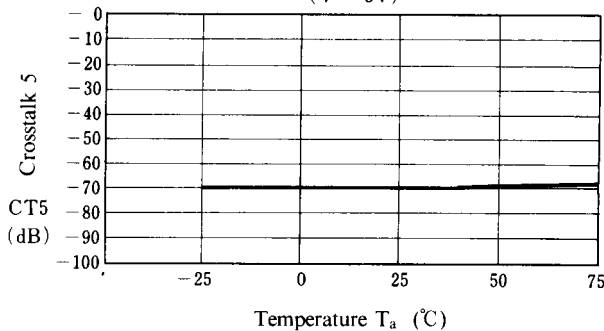


■ TYPICAL CHARACTERISTICS


Crosstalk 6 vs. Temperature

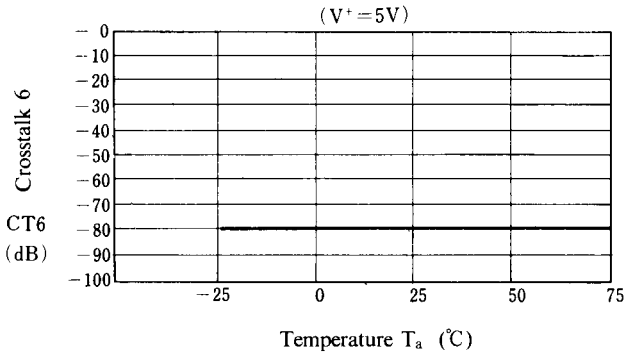


Switch Change Over 1 vs. Temperature

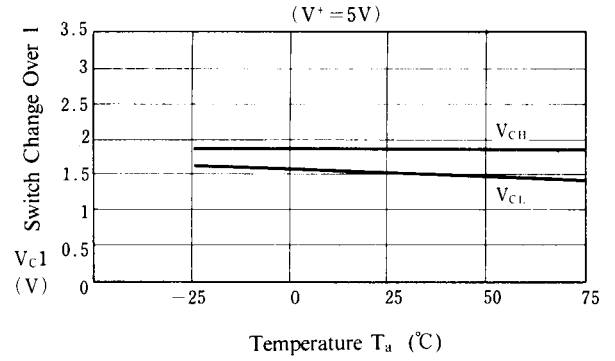


Operating Current vs. Operating Voltage

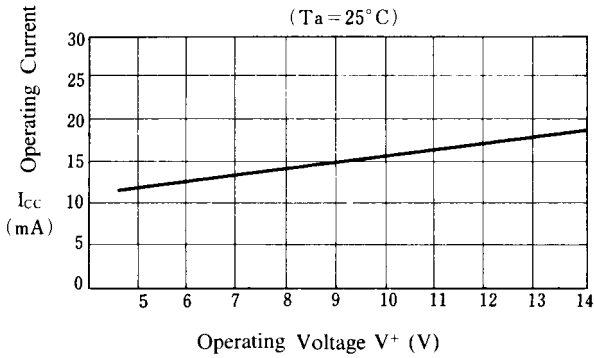


Voltage Gain 1 vs. Operating Voltage

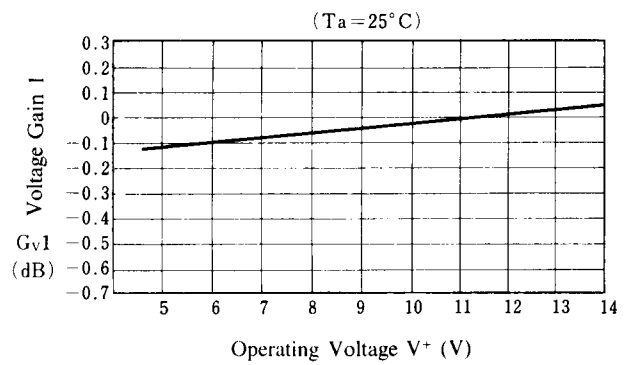

Frequency Gain 1 vs. Operating Voltage

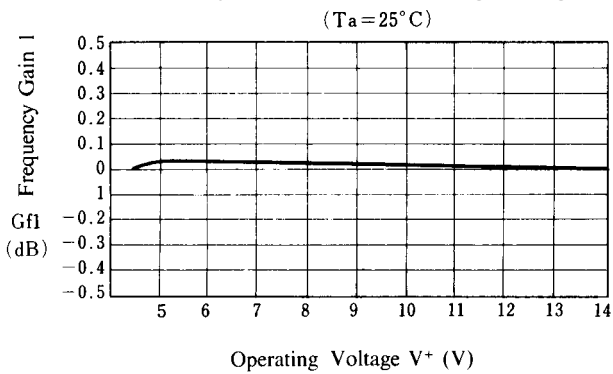


Differential Gain 1 vs. Operating Voltage

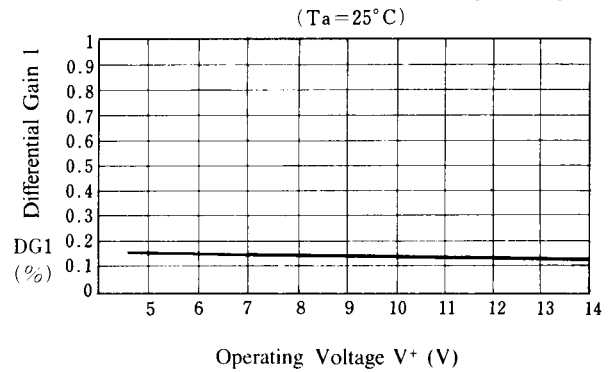

■ TYPICAL CHARACTERISTICS


Differential Phase 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

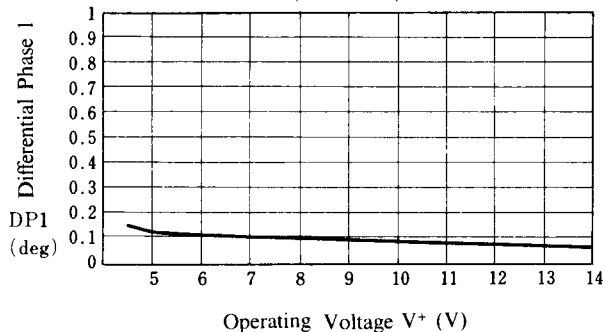


Offset Voltage 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

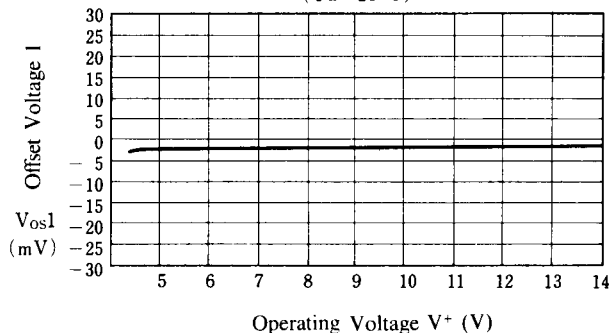


Crosstalk 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

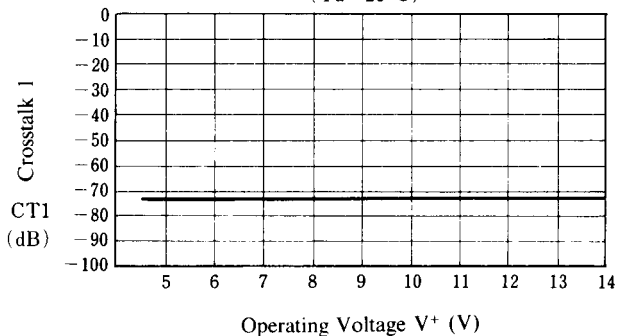


Crosstalk 2 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

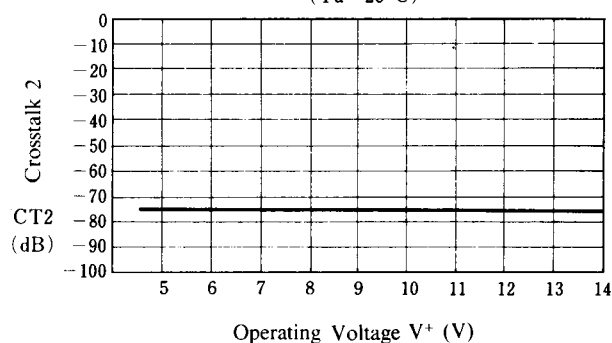


Crosstalk 3 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

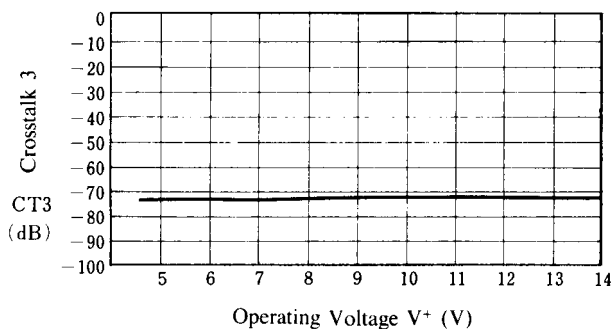

Crosstalk 4 vs. Operating Voltage


($T_a = 25^\circ\text{C}$)

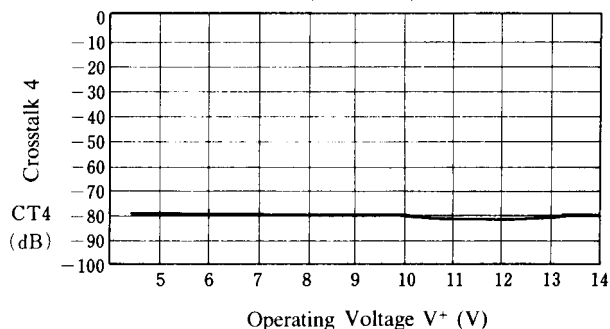

■ TYPICAL CHARACTERISTICS


Crosstalk 5 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

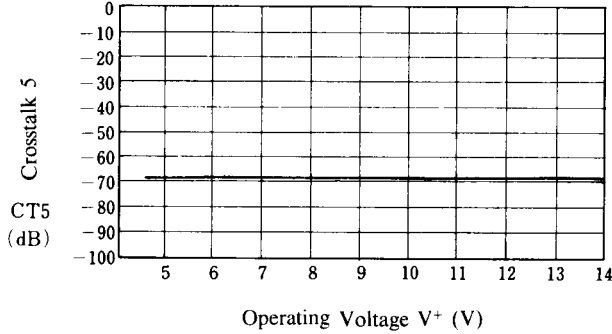


Crosstalk 6 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

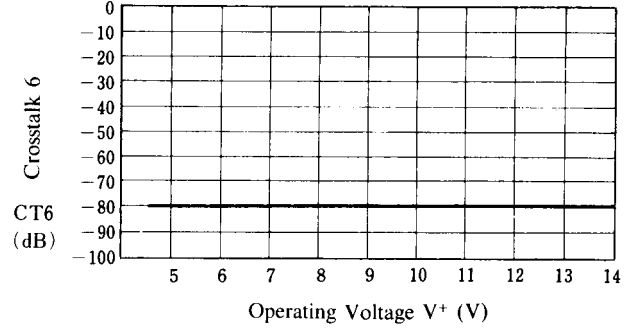


Switch Change Over 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

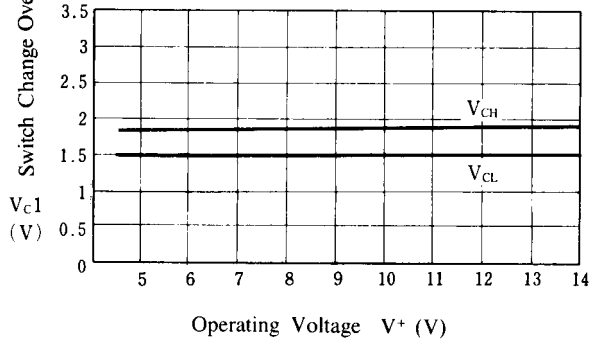


Differential Gain vs. APL

($T_a = 25^\circ\text{C}$)

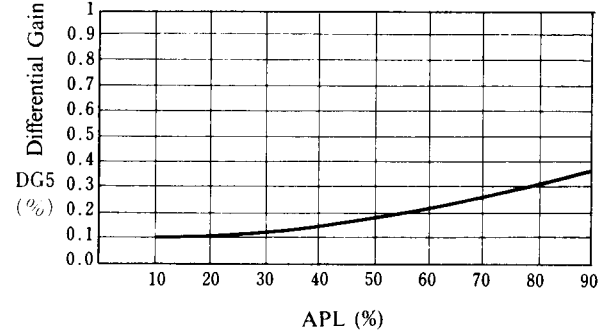


Voltage Gain 1 vs. Frequency Feature

($T_a = 25^\circ\text{C}$)

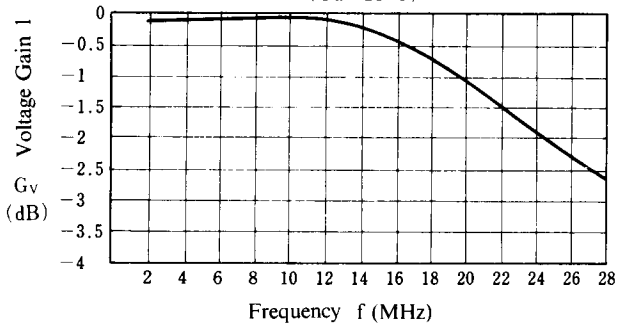


Differential Gain 1 vs. Load Resistor

($T_a = 25^\circ\text{C}$)

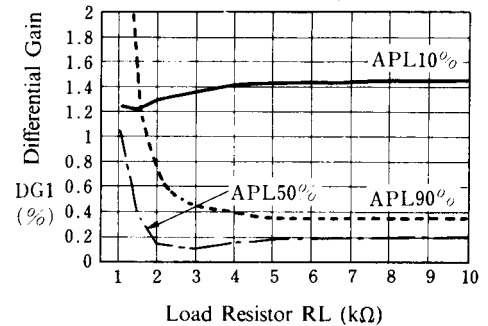


■ TYPICAL CHARACTERISTICS


Differential Gain 5 vs. Load Resistor

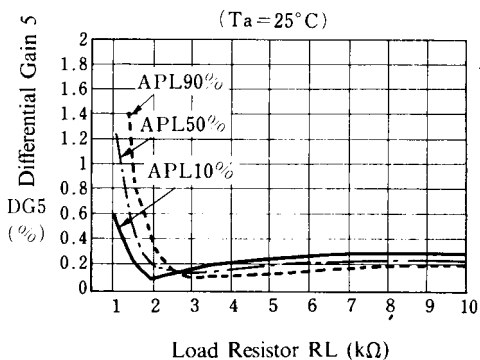


Differential Phase 1 vs. Load Resistor

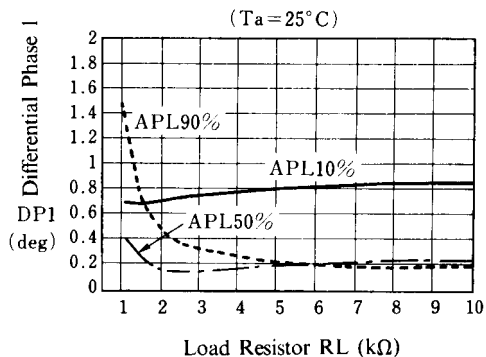


Differential Phase 5 vs. Load Resistor

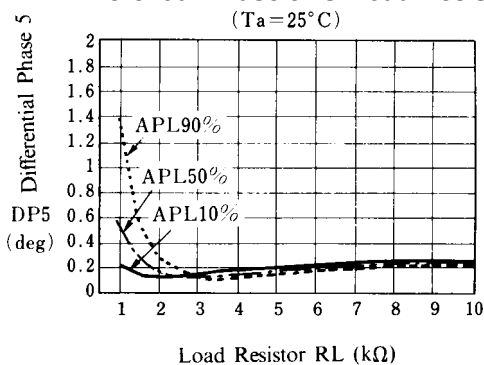


Differential Gain 1 vs. APL

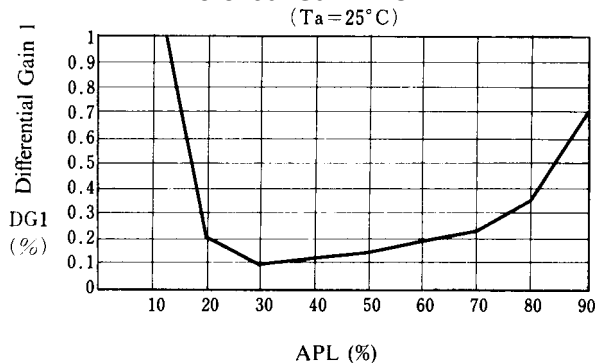

Differential Phase 1 vs. APL

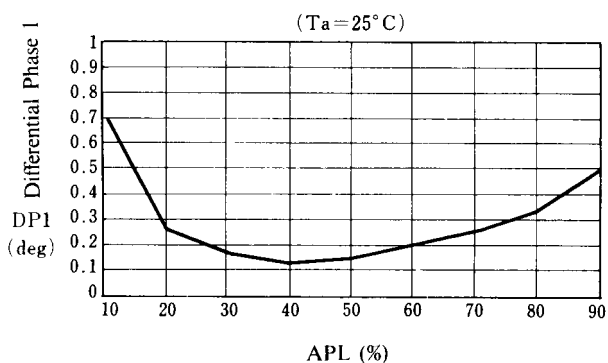


Differential Phase 5 vs. APL

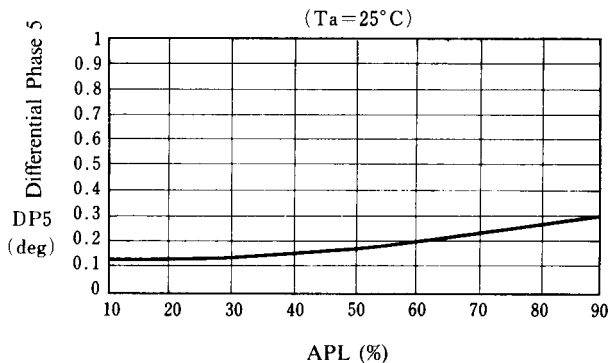

■ TYPICAL CHARACTERISTICS


Total Harmonic Distortion 1 vs. Load Resistor
($T_a = 25^\circ\text{C}$)

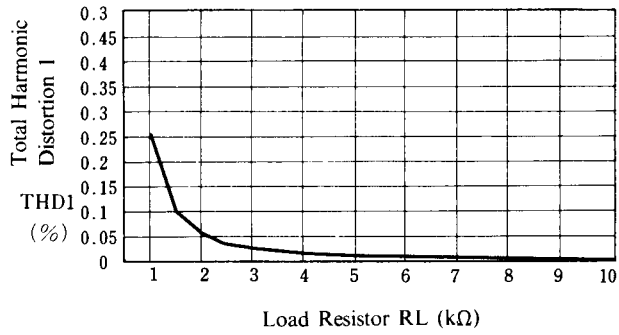


NJM2284

■ APPLICATION


This IC requires $1M\Omega$ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

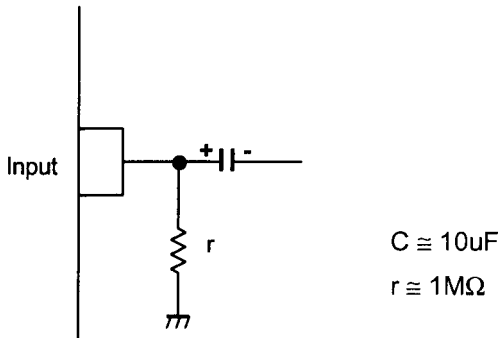

This IC requires $0.1\mu\text{F}$ capacitor between INPUT and GND, $1M\Omega$ resistance between INPUT and GND for clamp type input at mute mode.

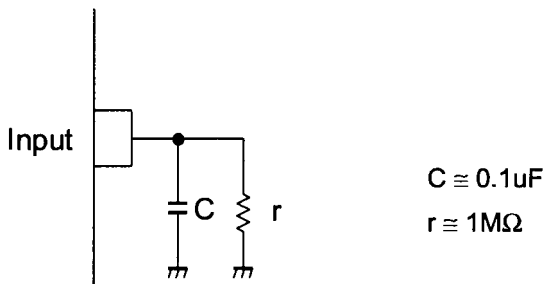

This IC requires $0.1\mu\text{F}$ capacitor between INPUT and GND for bias type input at mute mode.

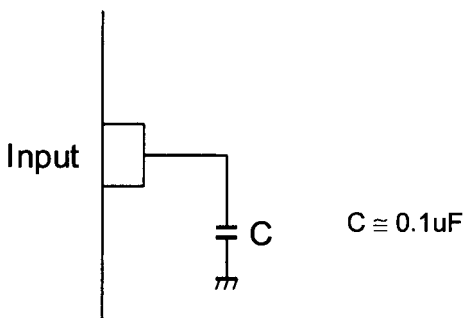

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2284M-TE1](#) [NJM2284M-TE2](#) [NJM2284V-TE1](#) [NJM2284V-TE2](#) [NJM2284M](#) [NJM2284D](#)